



UT20P Recirculating Pot Washer



The UT20P machine is specially designed to accommodate pots, pans, baking trays, mixing bowls, bun pans, tote boxes, standard Australian baking trays, garbage bins, and kitchen utensils. Top and bottom revolving wash and rinse arms provide a powerful and thorough wash action, and the new water jet designs with knife-like action, blast and strip heavy baked on dirt from all soiled surfaces. No damage to utensils thanks to wash jet balancing, reducing the need for hold-down devices. The front operation design provides easy access to the inside of the machine and for loading and unloading. The UT20P conforms to the highest of health and sanitary standards, meeting FSANZ safe food codes and certifications in HACCP and WaterMark.

UT20P standard features and benefits

- Chamber opening up to 540mm clear
- Durable stainless steel wash and rinse arms
- Independent wash and rinse systems with high volume pumps for powerful wash action
- Accurate digital temperature displays
- 2, 4 & 6 minutes wash cycle times
- Machine starts upon a push of a button
- Wash & rinse pump fitted a standard
- Operation interlocked to rinse temperature
- Pass-Through model available



2 mins



4 mins



6 mins



2 YEARS WARRANTY	10 YEARS PARTS AVAILABILITY	AUSTRALIAN DESIGNED	AUSTRALIAN MADE	OVER 90 YEARS OF SERVICE
------------------	-----------------------------	---------------------	-----------------	--------------------------

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.



1800 013 123 | +61 2 9604 7333
sales@middleby.com.au
middleby.com.au

VIC - TAS - 47 Stubbs Street, Kensington VIC 3031
QLD - U12, 210 Queensport Rd Nth, Murarrie QLD 4172
WA - U2, 9 Meares Way, Canning Vale WA 6155

HEAD OFFICE
AND MANUFACTURING PLANT
211-217 Woodpark Road, Smithfield NSW 2164


v1_2024



UT20P Recirculating Pot Washer



- A. Drain connection 2" BSP Gravity
- B. Water Supply 1/2" BSP
- C. Electrical connection 3 phase 415V + N

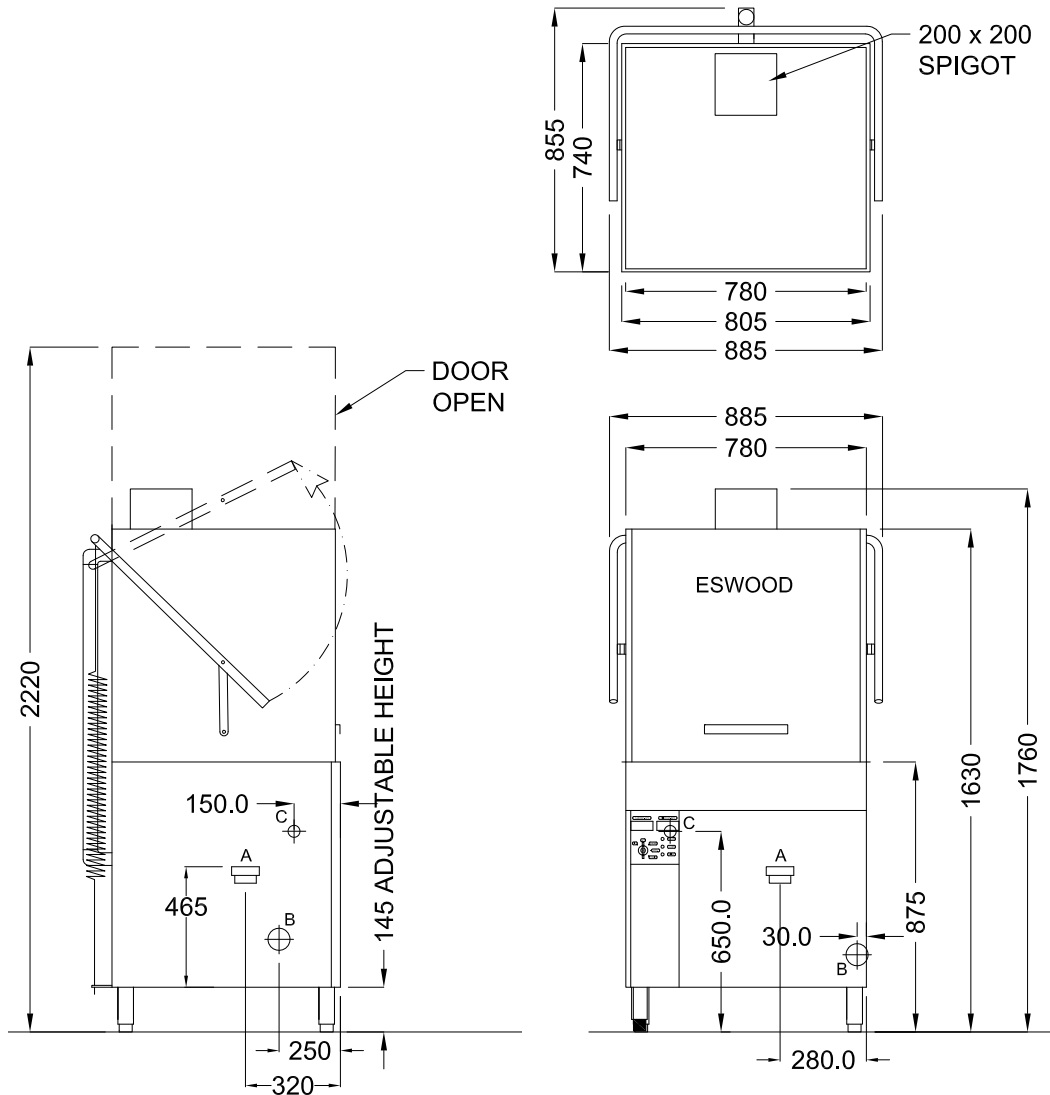

UT20P SPECIFICATIONS

DIMENSIONS (WxDxH)	805 x 855 x 1760 mm
HEIGHT WITH DOOR OPEN	2220 mm
WASH CHAMBER (WxDxH)	665 x 630 x 840 mm
RACK SIZE & OPENING (WxDxH)	660 x 610 x 540 mm
ELECTRICAL CONNECTION	3 Phase - 415V + N
RATING	13.5 kW
WATER CONNECTION	60°C / 2-4 bar (28-56 psi)

DRAIN CONNECTION	2" BSP Gravity
WASH CYCLE	2, 4 and 6 mins
WASH AND RINSE PUMP	Fitted
WATER CONSUMPTION	5L Cycle
TANK CAPACITY	70L
WEIGHT	160 kg
PACKED	1.5m ³



PE-388-GE-09

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.



1800 013 123 | +61 2 9604 7333
sales@middleby.com.au
middleby.com.au

VIC - TAS - 47 Stubbs Street, Kensington VIC 3031
QLD - U12, 210 Queensport Rd Nth, Murarrie QLD 4172
WA - U2, 9 Meares Way, Canning Vale WA 6155

HEAD OFFICE AND MANUFACTURING PLANT
 211-217 Woodpark Road, Smithfield NSW 2164

v1_2024